




TECH	TECHNICAL SPECIFICATIONS				
VOLTS		120			
AMPS		12.5			
WATTS		1465			
	HIGH	1465 watts			
HEATER	LOW	750 watts			
NO HEATER		22 watts			
	QUANTITY	LED			
LAMPS	WATTS				
	TOTAL WATTS	22 watts			
ROTOR MOTOR		1 at 5 watts			
HEIGHT, WIDTH, DEPTH		24 3/4 × 17 7/8 × 8 3/4"			
GLASS VIEWING OPENING		16 1/8 x 14 5/8			
GLASS SIZE		24 x 28			
SHIPPING SIZE		31 x 12 x 27 3/8			
SHIPPING WEIGHT		57.2 lbs			
	UNIT				
GLASS FRONT PLUG LOCATION		Included			
		Left Side			
CORD LENGTH		76''			
APPROX. HEATING AREA		400 sq ft			



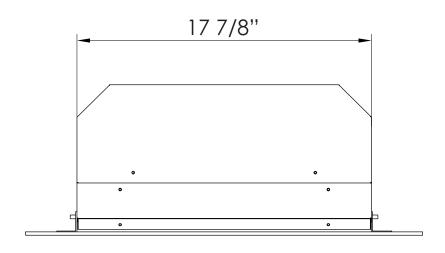


SERIES WM-BI		MODEL		REV	
		WM-BI-2428-VLR	SP.		
			c Us		
	SCALE 1" = 1'-0"	DATE: 12/1/2013	SHEET 1 OF 1		

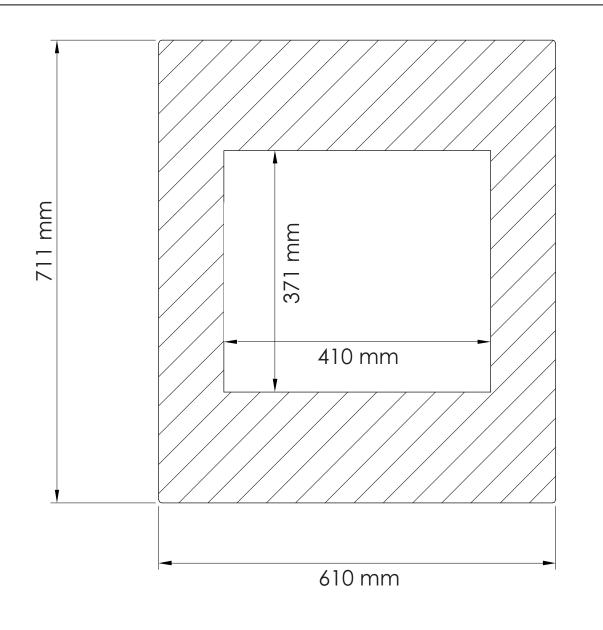

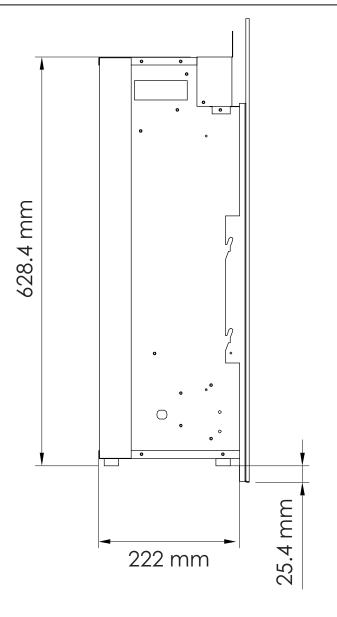

TECH	TECHNICAL SPECIFICATIONS				
VOLTS		120			
AMPS		12.5			
WATTS		1500			
LIEATED	HIGH	1500 watts			
HEATER	LOW	750 watts			
NO HEATER		22 watts			
	QUANTITY	LED			
LAMPS	WATTS				
	TOTAL WATTS	22 watts			
ROTOR MOTOR		1 at 5 watts			
HEIGHT, WIDTH, DEPTH		62.8 x 45.3 x 22.2 cm			
GLASS VIEWING OPENING		41 x 37.1 cm			
GLASS SIZE		61 x 71.1 cm			
SHIPPING SIZE		78.5 x 30.2 x 69.5cm			
SHIPPING WEIGHT		26 kg			
UNIT GLASS FRONT					
		Included			
PLUG LOCATION		Left Side			
CORD LENGTH		193 cm			
APPROX. HEATING AREA		37 sqm			

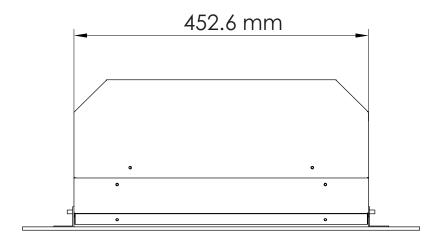



series WM-BI	MODEL WM-BI-2428-VLR	C US	REV 1
SCALE 1:12	DATE: 12/1/2013	SHEET 1 OF 1	