


# DESIGN SPECIALTIES

## INSTALLATION OF THE ALUMINUM DIRECT VENT FRONTS WITH OPERABLE DOORS


THE ALUMINUM DIRECT VENT FRONT WITH OPERABLE DOORS IS INTENDED TO FIT TO THE STEEL OUTER SHELL OF THE DIRECT VENT UNIT. MAGNETS AT THE CORNERS OF THE FRAME HOLD THE DOORS TO THE DIRECT VENT FIREPLACE. THE FRONT SHOULD REST ON THE FASCIA OR HEARTH AT THE BOTTOM. IF THERE IS NO SURFACE FOR THE FRONT TO REST, A STEEL ANGLE IS SUPPLIED THAT CAN BE ATTACHED AS SHOWN TO SUPPORT THE WEIGHT OF THE FRONT.

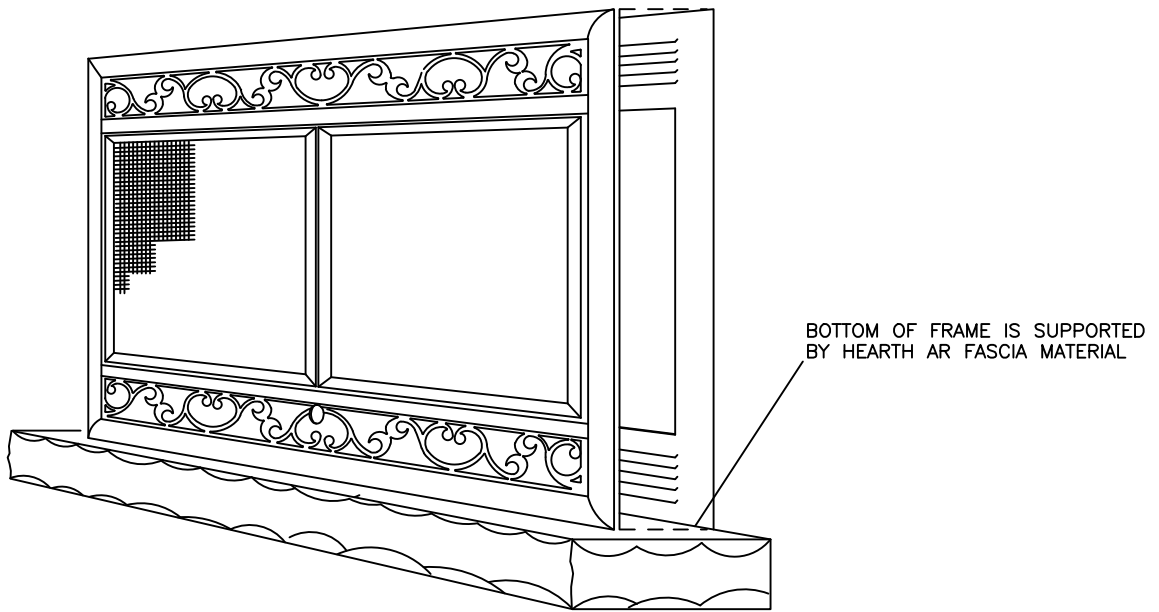

ALIGN ANGLE SO THE TOP IS EVEN WITH THE METAL OF THE FIREPLACE  
OR



STEEL SUPPORT ANGLE AND  
SELF TAPING SCREWS

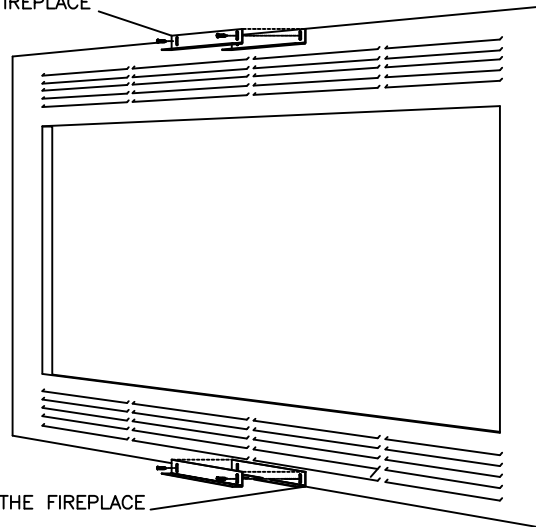

ALIGN ANGLE SO THE BOTTOM IS EVEN WITH THE BOTTOM OF THE FIREPLACE