




**Specifications**

AMT24-96

“Heat Shield” Option

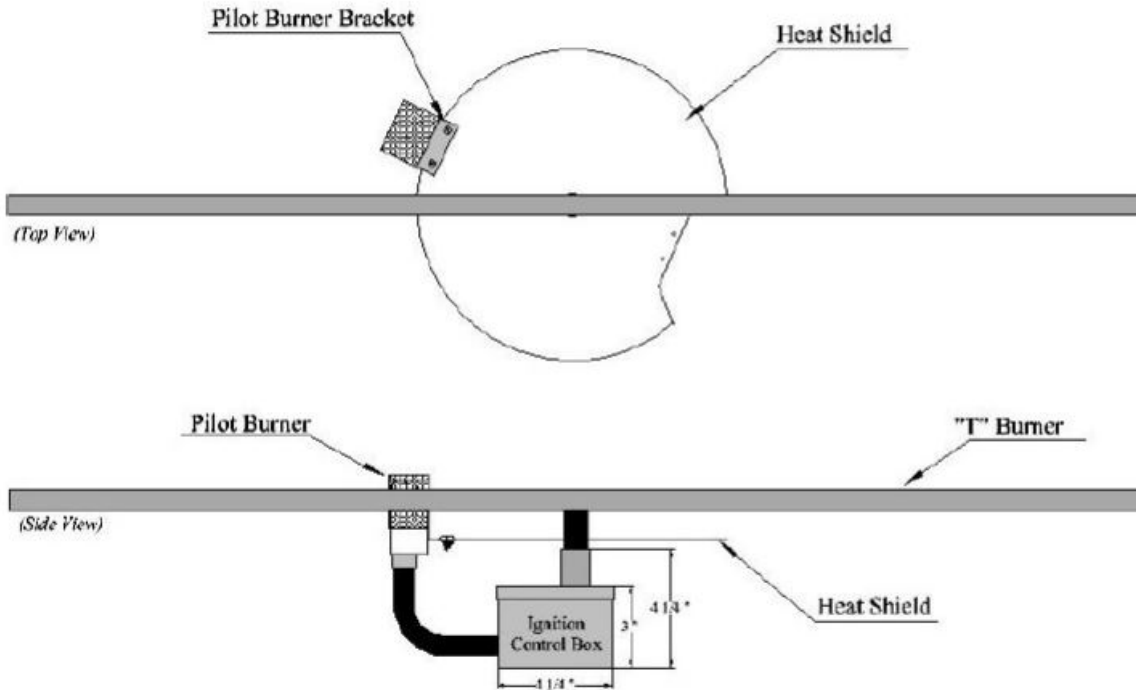

Flame/Heat Sense	Thermopile
Ignition Type	Hot Surface Ignition
Ignition Sequence	Intermittent Pilot
Ignition Source	Pilot Burner
Electrical Ratings	24 vac or 12 vac
Inlet Gas Pressure Limit	0.5 psi
Recommended Gas Pressure	NG: 7" WC LP: 11" WC
Max. Gas Output	290K Btu/hr

Model Number	Gas Load (Btu/hr)
AMT24	25,000
AMT36	37,000
AMT48	50,000
AMT60	62,000
AMT72	75,000
AMT84	87,000
AMT96	100,000

**Certifications for AMT24-96**

ANSI Z21.97-2014/CSA 2.41-2014  
CSA C22.2 No. 3 \* M1998 (R2014)