


Pool Scupper Bowl Installation Guide

Fireplace Doors Online highly recommends having a qualified technician or contractor complete this installation for you. Due to the fact that every customer has a different pool style and circulatory system, these are very generic installation guidelines and may not apply 100% to your situation. In addition, these directions may not be relevant to your design configurations if you are planning on using the scupper bowl as a fountain. The following information is suggested material only. Fireplace Doors Online cannot be held liable for damages or loss caused by leaks or other issues due to faulty installation, sealing, etc.



Please consult with a professional contractor for the appropriate way to install this feature and detect any potential obstacles that could create problems or damage to your landscape.


Make sure you have plans drawn up for the location of your water feature. Prepare the location prior to installation; it is likely that this will be best determined by your professional contractor. Your water feature may need to be situated near the return side of your pool equipment (ie. Pump); ideally atop a pillar or column. (Example of a scupper bowl setup is shown in the picture to the right.)

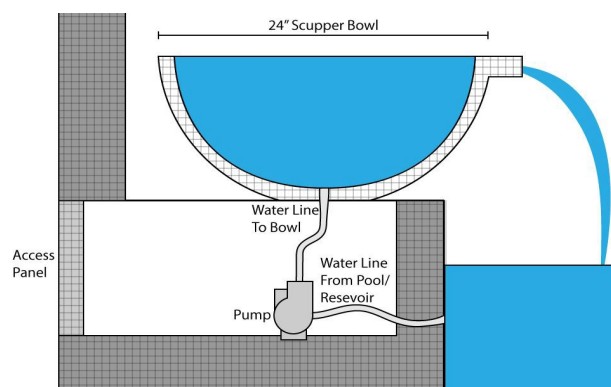

Please confirm that the pillar or surface where your scupper bowl is going to be installed is level and stable. You may need to use shims to achieve an even platform.

Take into consideration that our concrete products tend to be quite heavy and can be difficult to maneuver. Having an extra person or two on hand to help you transport your scupper bowl is necessary. In the case of a product weighing in excess of 500 pounds, a hand-truck or forklift will be necessary to moving the bowl to its designated spot.

Thread a water line (1" PVC) from your pool's circulatory system to your scupper bowl. (If you have chosen to install your water feature on a pillar, you will need to install the line into the middle of the column.) Your scupper bowl already has a 2" pre-drilled hole in the center of the basin; thread the line through this hole and add a "tee" fitting to the top of the 1" PVC. This will help regulate the water flow rate into your bowl.

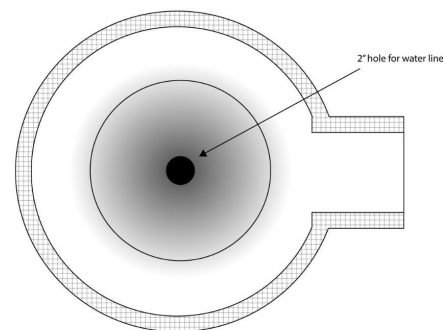

Apply a layer of clear, all purpose contact adhesive and sealant (such as Amazing Goop) to permanently attach the base of the bowl to the platform. Apply another layer of the epoxy to the gap around the PVC line. It is very important that your scupper bowl is watertight.

Many contractors recommend installing in a valve after the pump for adjusting and shutting off the water flow.

Always follow the care guidelines as detailed in your Concrete Bowl Manual.

