POWER REQUIREMENTS	AC 120 v @ 60Hz		
	BATTERY BACKUP	4X AA+ BATTERY	
LAMPS	LED 5v RGB	WS2811 DIODES	
	IR REMOTE CONTROLLER		
	CUSTOMIZABLE WIFI APP		
PROFLAME II SYSTEM	5 LEVELS OF FLAME INTENSITY		
	REMOTE CONTROLLED IGNITION		
	VENTED CONFIGURATION ONLY		
GLOWFIRE LOG SPECIES	LDBT-WD60	WESTERN DRIFTWOOD	
HEATING OUTPUT	MAXIMUM HEAT (EN)	95,000 BTU/hr	27.84 kW
	MINIMUM HEAT (EN)	60,000 BTU/hr	17.58 kW
	MAXIMUM HEAT (EP)	75,000 BTU/hr	21.98 kW
	MINIMUM HEAT (EP)	40,000 BTU/hr	11.72 kW

NOTE:
EN- NATURAL GAS
EP- PROPANE
MUST ADD GLOWFIRE LOGS

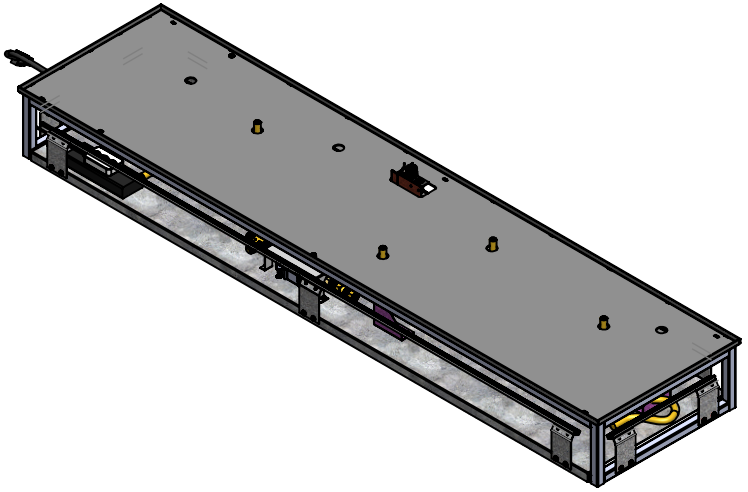

MINIMUM FIRE BOX DIM. (INCHES)		
WIDTH	DEPTH	HEIGHT
60	15	20

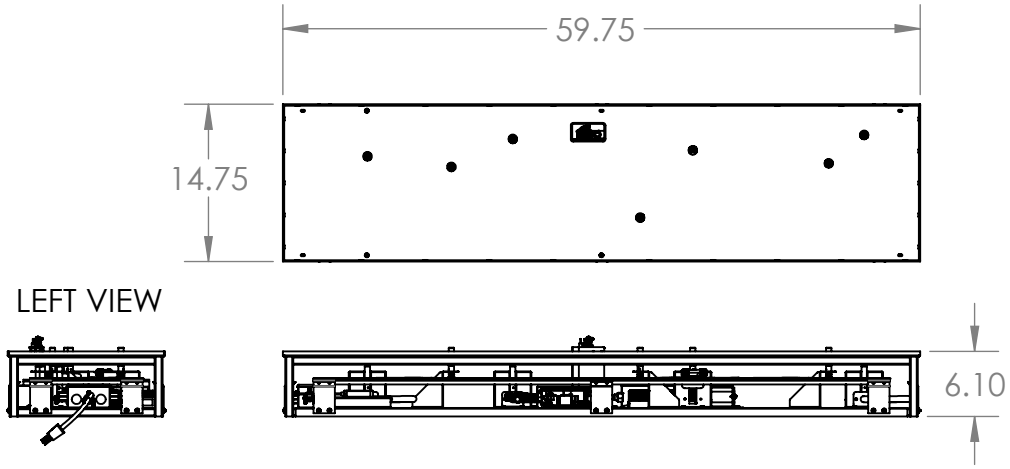

LEFT VIEW

POWER OUT

RIGHT VIEW



GAS OUT

GRAND CANYON GAS LOGS

TITLE:
BEDROCK TRADITIONAL
LINEAR DROP IN BURNER
LDBT60-EN, LDBT60-EP

SIZE	DWG. NO.	REV
A	LDBT60-XX	B

SCALE: N/A | WEIGHT: | SHEET 1 OF 1