



SPECIFICATION SHEET



SEBCO 100-300 ^{WATT}

FEATURES

- 10 YEAR FREE REPLACEMENT WARRANTY
- FULLY DIMMABLE, WITH LOW-VOLTAGE MAGNETIC DIMMER
- 1/8" STEEL, POWDER COATED NEMA 3R CASE
- 96 WATT MAX CLASS "2" LISTED OUTPUTS
- SOME 120 VOLT TRANSFORMERS AVAILABLE WITH PRIMARY LINE CORD.
- BUILT IN THE USA TO THE HIGHEST STANDARDS
- MEETS OR EXCEEDS ALL UL, CUL, ANSI/UL, CSA REQUIREMENTS. 230 VAC TRANSFORMERS MEET CE REQUIREMENTS

REQUIREMENTS




- LISTED TO THE NEWEST UL STANDARDS 2108 AND 1838
- MANDATORY SECONDARY PROTECTION, AS STATED IN THE NATIONAL ELECTRIC CODE ARTICLE 411, (1993, 1996, 1999, 2002, 2005 AND 2008)
- MAY BE USED WITH INDIVIDUAL "LISTED" COMPONENTS TO MEET "SYSTEM" REQUIREMENTS, AS LONG AS ALL PARTS LISTED TO SAME ANSI/UL STANDARD

	CLASS 2	CLASS 2	CLASS 2	CLASS 2
PART NUMBER	1111 (100 Watt)	1112 (150 Watt)	1113 (250 Watt)	1124 (300 Watt)
PRIMARY VOLTAGE	120VAC-1A MAX	120VAC-1.4A MAX	120VAC-2.3A MAX	120VAC-2.75A MAX
OUTPUT VOLTAGE	24VAC-4.2A MAX	24VAC-6.25A	24VAC-10.5A MAX	24VAC-12.5A MAX
BREAKERS	1x4A	2x4A	3x4A	3x4A
FREQUENCY	60 Hz	60 Hz	60 Hz	60 Hz
DIMENSIONS	6.75" x 5" x 4.5"	6.75" x 5" x 4.5"	6.75" x 5" x 4.5"	6.75" x 5" x 4.5"
WEIGHT	10 LBS.	10 LBS.	13 LBS.	13 LBS.



24 VOLT INSTALLATION DIAGRAM

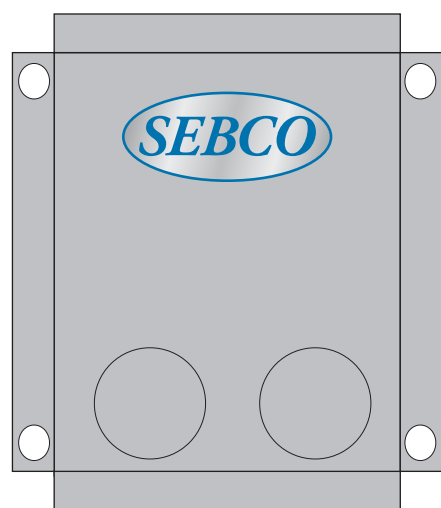

- H-1 • TO 100V, 120V, 230V, 277V HOT
- H-2 • TO 100V, 120V, 230V, 277V COMMON
- X-1 • 24 VOLT COMMON
- X-4 • CONNECTED BY FACTORY
- 24 VOLT LEAD • HOT

GROUND LUG INCLUDED FOR PRIMARY SIDE INSTALLATION

- PREWIRED TO TRANSFORMER
- 24 VOLT HOT
- 24 VOLT COMMON
- X-1 • 24V COMMON

