CROSS TIMBERS

SINGLE SIDED LOG DIAGRAM

CTS2108RG

CTS2409RG

Step 1 Step 1


F0017GO F2522GO

FR018GO
FR024GO

Step 2 Step 2






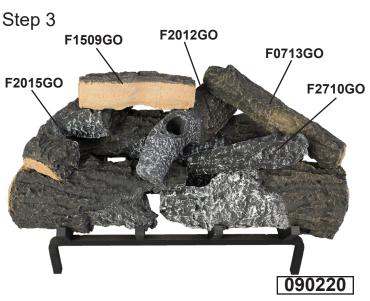

CROSS TIMBERS SINGLE SIDED

LOG DIAGRAM

CTS3010RG

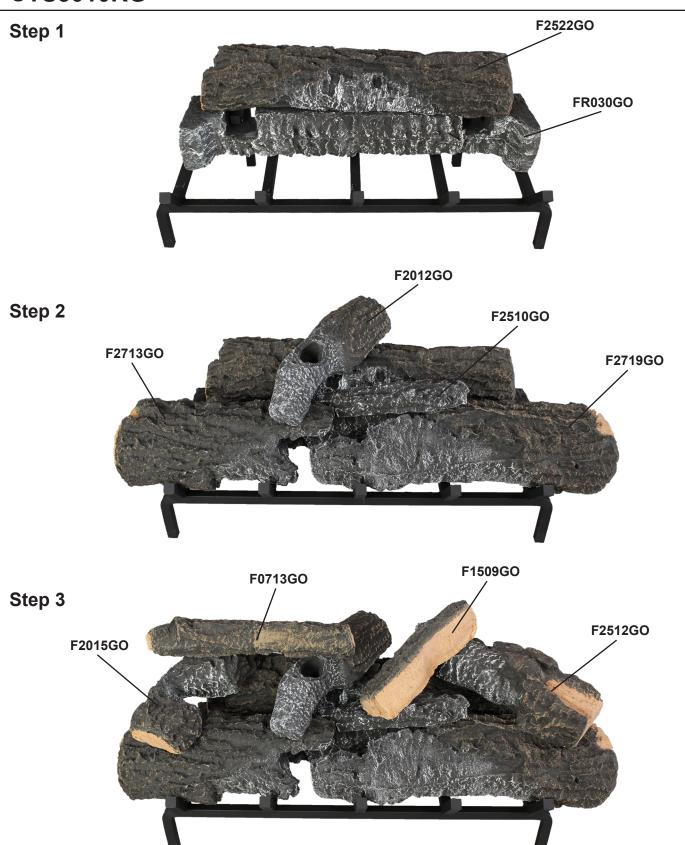



CROSS TIMBERS SINGLE SIDED

LOG DIAGRAM

CTS3611RG




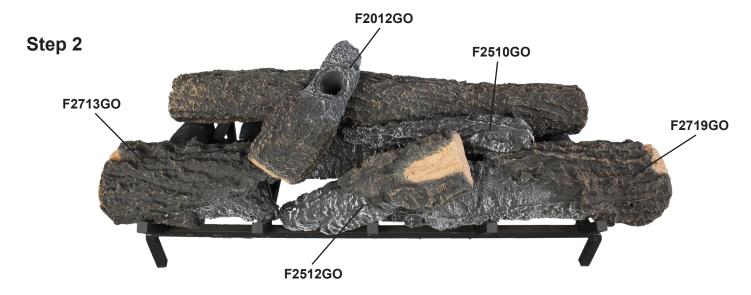

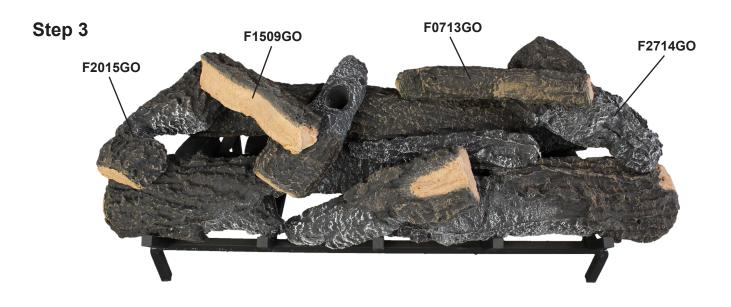

CROSS TIMBERS

INDIVIDUAL LOG DIAGRAM

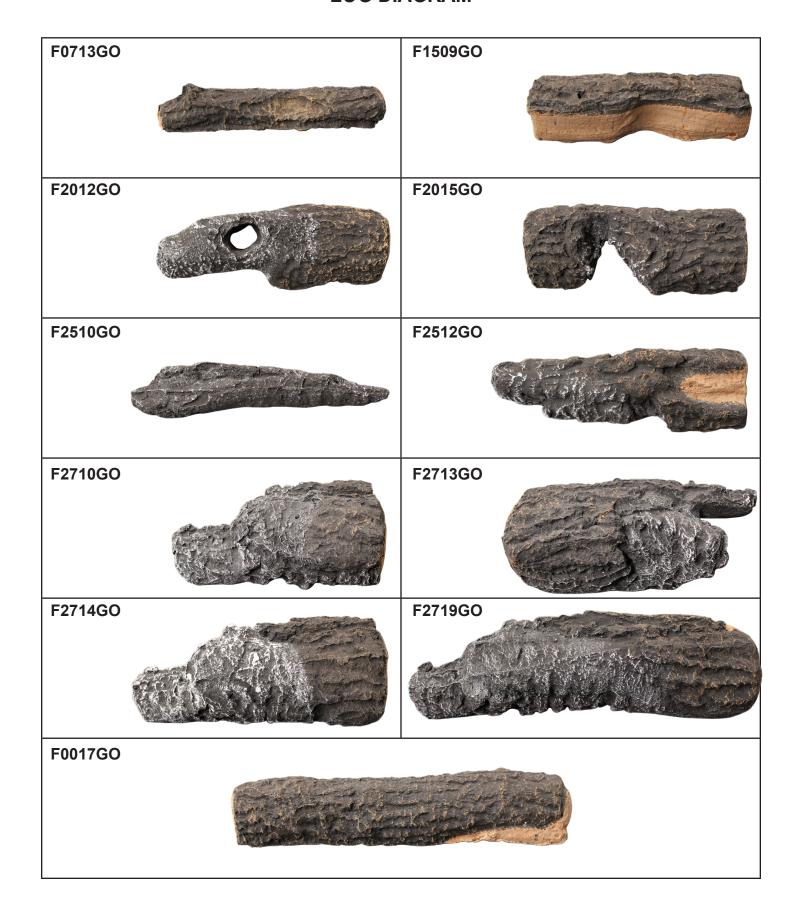

CROSS TIMBERS

INDIVIDUAL LOG DIAGRAM





F0822GO



FR018GO



FR020GO



FR024GO



FR030GO



FR036GO



RADIANT GLOW BRACKET INSTRUCTIONS

PLEASE REFER TO ACCESSORY KIT INSTRUCTIONS FOR BURNER AND VALVE INSTALLATION A VIDEO VERSION OF THIS INSTRUCTION MAY BE FOUND AT www.youtube.com/watch?v=AohLv2XcA4E

WARNING: This is a supplemental instruction to clarify the installation of the radiant glow kit, carefully read all


RADIANT GLOW BRACKET

instructions before attempting to install this log set.



PARTS LIST

- 1. RADIANT GLOW BRACKET
- 2. EMBERS

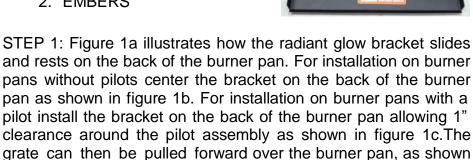








STEP 2: Fill the burner pan with the appropriate media as shown in figure 2a (sand for NG and vermiculite for LP) Install the grate over the burner pan. The front legs of the grate go around the burner pan and about 1" in front of the burner pipe as shown in figure 2b.





STEP 3: Stuff the embers under the Radiant Riser to fill the gap between the radiant glow bracket and the riser. Also use the embers to cover the visible surface of the radiant bracket as shown in figure 3.



STEP 4: Stuff the embers into the notches of the Radiant Riser and cover all visible burner media as shown in figure 4. Now install the Radiant Heat series logs according to the log diagram sheet included with you log set.

SAFETY PRECAUTIONS

- Do not place clothing or other flammable items on or near the gas log set.
 Items placed near the log set can become very hot due to the radiant heat of the log set.
- Do not touch the log set and educate all children of the danger of the gas log set. Young children should be supervised when they are in the same room as the log set.
- Due to the high temperature, the gas log set should be located away from furniture and draperies.