

# Spokane™ 1250 & 1750 Wood Stoves

**AVALON**<sup>™</sup>  
Firestyles for Life



## *Firestyles. Simplified.*

On a budget or looking for a lower cost wood stove? The new Spokane wood stove line from Avalon is the perfect choice. The Spokane line is available in two entry level models that are ideal for small to mid-sized homes or for those wishing to heat specific areas of their homes. Avalon engineers have managed to produce a low cost wood stove with the great performance and style you've come to expect from Avalon. No frills added. Just beautiful, radiant heat. All models feature large cooktop surfaces and are available with a choice of sculptured legs or pedestal. Add the optional 160 CFM fan to enhance the transfer of radiant heat into your home.

For heating solutions that meet every lifestyle. Avalon. Firestyles for life.

*Avalon firestyles are proudly made in the U.S.A.*



### Model 1250

Height - Legs 26 1/2"  
Width - 23 5/8"  
Flue Center From Back - 4 1/8"

Height - Pedestal 29 3/4"  
Depth - 14 5/8"

EPA Emissions 4.4 Grams/Hr.	Efficiency Up To 79.6 %	Maximum Btu's/Hour** 66,800	Firebox Size 1.6 Cu. Ft.
Heating Capacity* 600 to 1,200 Sq. Ft.	Maximum Burn Time** Up to 8 Hours	Maximum Log Length Up to 18 inches	Weight 243 Lbs.

### Model 1750

Height - Legs 26 1/2"  
Width - 24"  
Flue Center From Back - 5 3/4"


Height - Pedestal 30 5/8"  
Depth - 23 1/2"

EPA Emissions 1.9 Grams/Hr.	Efficiency Up To 78.8 %	Maximum Btu's/Hour** 72,400	Firebox Size 2.2 Cu. Ft.
Heating Capacity* 1,200 to 2,000 Sq. Ft.	Maximum Burn Time** Up to 10 Hours	Maximum Log Length Up to 18 inches	Weight 430 Lbs.

\* Heating Capacity may vary depending on the degree of home insulation, floor plan, ambient temperature zone of the area in which you live.

\*\* BTU Output and Burn Times may vary depending on moisture content of wood, wood type, chimney draft and oxygen supply.


## Clearances To Combustibles

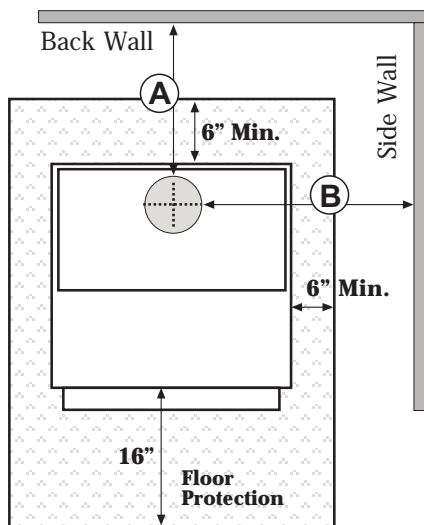

Model 1250	Single Wall Connector	Double Wall Connector
A =	19 1/4"	11 1/4"
B =	27"	26 1/2"
C =	17 3/4"	17 1/4"
D =	10"	10"

Model 1750	Single Wall Connector	Double Wall Connector
A =	17 3/4"	6 1/2"
B =	24"	21 1/2"
C =	24"	15"
D =	15"	6 1/2"

Measure rear and side clearances (A) (B) & (C) from edge of the stove flue. Measure corner clearance (D) from the top corner of stove.

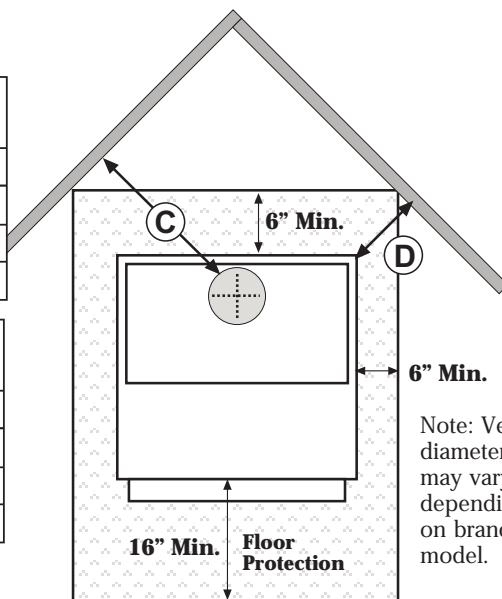

Note: Vent diameter may vary depending on brand and model.

Measure front, rear and side hearth pad clearances from edges of the stove top. Floor protection must be non-combustible and at least .018" thick (26 gauge). Minimum hearth pad sizes: **Model 1250** - 36" Wide x 37" Depth **Model 1750** - 36" Wide x 45 1/2" Depth For all installation and clearance information please consult the Owner's Manual or visit [www.avalonfirestyles.com](http://www.avalonfirestyles.com).

Your Avalon Authorized Dealer is Located At:



Visit our Website at:  
[www.avalonfirestyles.com](http://www.avalonfirestyles.com)

© Copyright T. I. 2006 Printed in U.S.A. We reserve the right to improve or change our products without prior notification. Consult the Owner's Manual for complete installation requirements. #98800009